

Datasheet

PWPR-2K-SI

Ultra-Low Noise 2 kHz Photoreceiver with Si-PIN Photodiode




Features

- Si-PIN photodiode, 1.2 mm active diameter
- Bandwidth DC – 2 kHz
- Amplifier transimpedance gain switchable 1.0×10^9 V/A, 1.0×10^{10} V/A
- Spectral range 320 – 1060 nm
- Ultra-low noise, NEP 9 fW/√Hz
- Free-space input 1.035"-40 threaded, easily convertible to fiber optic input (FC and FSMA) with optionally available screw-on adapters
- UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread

Applications

- Spectroscopy, reflection and transmission measurements
- Highly sensitive optoelectronic measurements
- Applications utilizing optical chopper modulation
- Optical front-end for oscilloscopes, A/D converters and lock-in amplifiers

Block Diagram

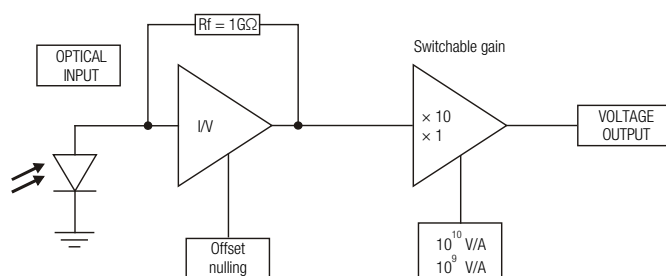

BS01-PWPR_R01

Intended Use

The PWPR-2K-SI is a ultra-low noise variable gain photoreceiver. It is designed for fast and precise conversion of small optical signals into equivalent output voltages. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de.

For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.

The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

FEMTO

PWPR-2K-SI_R2/TH_JMa/16APR2024

Datasheet

PWPR-2K-SI

Ultra-Low Noise 2 kHz Photoreceiver with Si-PIN Photodiode


Available Version	PWPR-2K-SI-FST  1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm) for free space applications, compatible with many optical standard accessories Optionally available: Fiber adapters PRA-FC, PRA-FCA and PRA-FSMA, with the relative large 1.2 mm dia. photodiode installed in the PWPR-2K-SI input coupling is not critical, however, standard SM 9/125 fibers (PC or APC) with low numerical aperture (NA) are recommended for ensuring near 100% coupling efficiency										
Related Model	PWPR-2K-IN-FST InGaAs-PIN, Ø 0.5 mm, 900 - 1700 nm free space input, 1.035"-40 threaded flange										
Available Accessories	PRA-FC PRA-FCA PRA-FSMA  Fiber-adapter with external 1.035"-40 thread (suitable for FST models only) PRA-PAP  Alternative mounting option: post adapter plate, easy to mount on FEMTO photoreceiver series OE, FWPR, PWPR, HCA-S and LCA-S PS-15-25-L  Power Supply input: 100 – 240 VAC output: ±15 VDC										
Specifications	<table> <tr> <td>Test conditions</td><td>$V_s = \pm 15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance 1 MΩ, warm-up 20 minutes (min. 10 minutes recommended)</td></tr> <tr> <td>Gain</td><td> Transimpedance gain: 1.0 × 10⁹ V/A, 1.0 × 10¹⁰ V/A, switchable (@ output load ≥ 100 kΩ) Gain accuracy: ±1 % (electrical) Conversion gain: 6.4 × 10⁹ V/W, 6.4 × 10⁸ V/W typ. (@ 900 nm, output load ≥ 100 kΩ) </td></tr> <tr> <td>Frequency Response</td><td> Lower cut-off frequency: DC Upper cut-off frequency (–3 dB): 2 kHz </td></tr> <tr> <td>Time Response</td><td>Rise/fall time (10 % – 90 %): 165 μs</td></tr> <tr> <td>Input</td><td> Input offset current (dark current): 0.6 pA typ. Input offset current drift: factor 2 / 10 °C Input offset compensation range: ±120 pA (adjustable by offset potentiometer) Optical saturation power: 15.6 nW (@ 10⁹ V/A, 900 nm) 1.56 nW (@ 10¹⁰ V/A, 900 nm) NEP: 9 fW/$\sqrt{\text{Hz}}$ (@ 900 nm, 100 Hz) </td></tr> </table>	Test conditions	$V_s = \pm 15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance 1 M Ω , warm-up 20 minutes (min. 10 minutes recommended)	Gain	Transimpedance gain: 1.0 × 10⁹ V/A, 1.0 × 10¹⁰ V/A, switchable (@ output load ≥ 100 kΩ) Gain accuracy: ±1 % (electrical) Conversion gain: 6.4 × 10⁹ V/W, 6.4 × 10⁸ V/W typ. (@ 900 nm, output load ≥ 100 kΩ)	Frequency Response	Lower cut-off frequency: DC Upper cut-off frequency (–3 dB): 2 kHz	Time Response	Rise/fall time (10 % – 90 %): 165 μ s	Input	Input offset current (dark current): 0.6 pA typ. Input offset current drift: factor 2 / 10 °C Input offset compensation range: ±120 pA (adjustable by offset potentiometer) Optical saturation power: 15.6 nW (@ 10⁹ V/A, 900 nm) 1.56 nW (@ 10¹⁰ V/A, 900 nm) NEP: 9 fW/$\sqrt{\text{Hz}}$ (@ 900 nm, 100 Hz)
Test conditions	$V_s = \pm 15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance 1 M Ω , warm-up 20 minutes (min. 10 minutes recommended)										
Gain	Transimpedance gain: 1.0 × 10⁹ V/A, 1.0 × 10¹⁰ V/A, switchable (@ output load ≥ 100 kΩ) Gain accuracy: ±1 % (electrical) Conversion gain: 6.4 × 10⁹ V/W, 6.4 × 10⁸ V/W typ. (@ 900 nm, output load ≥ 100 kΩ)										
Frequency Response	Lower cut-off frequency: DC Upper cut-off frequency (–3 dB): 2 kHz										
Time Response	Rise/fall time (10 % – 90 %): 165 μ s										
Input	Input offset current (dark current): 0.6 pA typ. Input offset current drift: factor 2 / 10 °C Input offset compensation range: ±120 pA (adjustable by offset potentiometer) Optical saturation power: 15.6 nW (@ 10⁹ V/A, 900 nm) 1.56 nW (@ 10¹⁰ V/A, 900 nm) NEP: 9 fW/$\sqrt{\text{Hz}}$ (@ 900 nm, 100 Hz)										

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

PWPR-2K-SI_R2/TH_JMa/16APR2024

Datasheet
PWPR-2K-SI
**Ultra-Low Noise 2 kHz Photoreceiver
with Si-PIN Photodiode**

Specifications (continued)		
Detector	Detector Active area Spectral range Max. sensitivity	Si-PIN photodiode Ø 1.2 mm 320 – 1060 nm 0.64 A/W typ. (@ 900 nm)
Output	Output voltage range Output impedance Max. output current Output noise	–1.2 V ... +10 V (@ ≥ 100 kΩ output load) 50 Ω (terminate with ≥ 100 kΩ load) 30 mA (short-circuit proof) 0.45 mV RMS (3 mV peak-peak) typ. (@ 10 ⁹ V/A, ≥ 100 kΩ load, no signal on detector, measurement bandwidth 8 KHz)
Optical Input Connector	Material FST flange Material FST coupler ring	1.4305 stainless steel, nickel-plated 1.4305 stainless steel, glass bead blasted
Power Supply	Supply voltage Supply current	±15 V (±14.5 V ... ±16.5 V) +32 mA / –25 mA (depends on operating conditions, recommended power supply capability min. ±100 mA)
Case	Weight Material	220 g (0.49 lbs) PWPR-2K-SI-FST incl. coupler ring AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature Operating temperature	–30 °C ... +85 °C 0 °C ... +50 °C
Absolute Maximum Ratings	Optical input power (CW) Power supply voltage	10 mW ±20 V
Connectors	Input Output Power supply	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories BNC jack (female) LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)  Pin 1: +15 V Pin 2: –15 V Pin 3: GND
Scope of Delivery	PWPR-2K-SI, internally threaded coupler ring, LEMO® 3-pin connector, datasheet, transport package	
Ordering Information	PWPR-2K-SI-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

PWPR-2K-SI_R2/TH_JMa/16APR2024

Datasheet
PWPR-2K-SI
**Ultra-Low Noise 2 kHz Photoreceiver
with Si-PIN Photodiode**


Spectral Responsivity

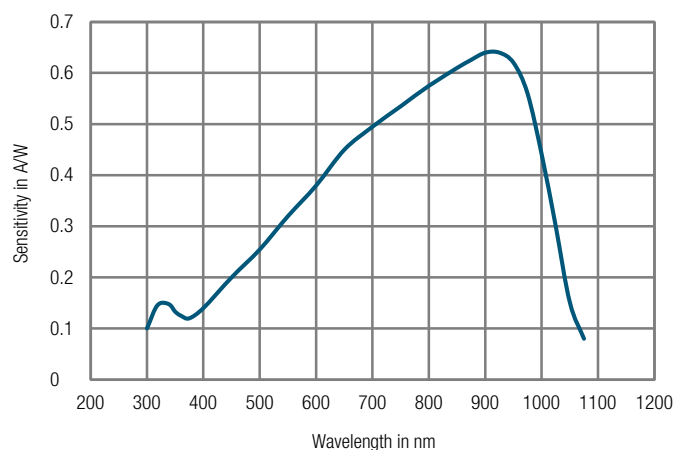


DB-Sens-PWPR-2K-SI_R02

 Typical Performance
Characteristics

Frequency Response

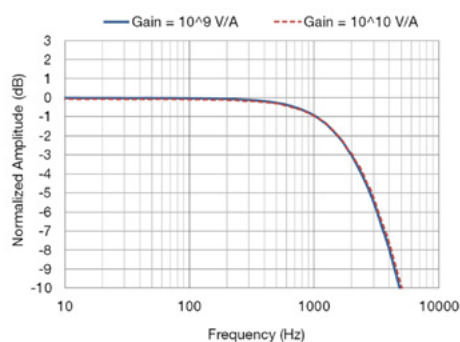

Output Noise

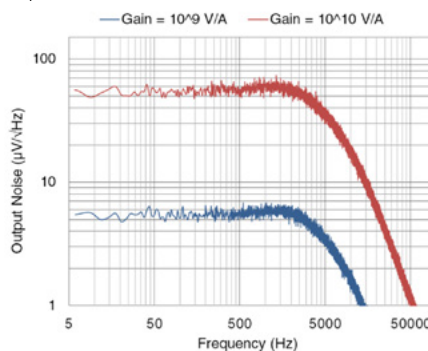

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

PWPR-2K-SI_R2/TH_JMa/16APR2024


Datasheet

PWPR-2K-SI


Ultra-Low Noise 2 kHz Photoreceiver with Si-PIN Photodiode

Typical Performance
Characteristics (continued)

Step Signal Response @ 2500 pW (p-p, 850 nm)




acquisition without averaging




acquisition with 64x averaging

Step Signal Response @ 100 pW (p-p, 850 nm)



acquisition without averaging




acquisition with 64x averaging

Step Signal Response @ 10 pW (p-p, 850 nm)



acquisition without averaging



acquisition with 64x averaging


SOPHISTICATED TOOLS FOR SIGNAL RECOVERY

F E M T O

PWPR-2K-SI_R2/TH_JMa/16APR2024

Datasheet
PWPR-2K-SI
**Ultra-Low Noise 2 kHz Photoreceiver
with Si-PIN Photodiode**
Dimensions

PWPR-2K-SI-FST

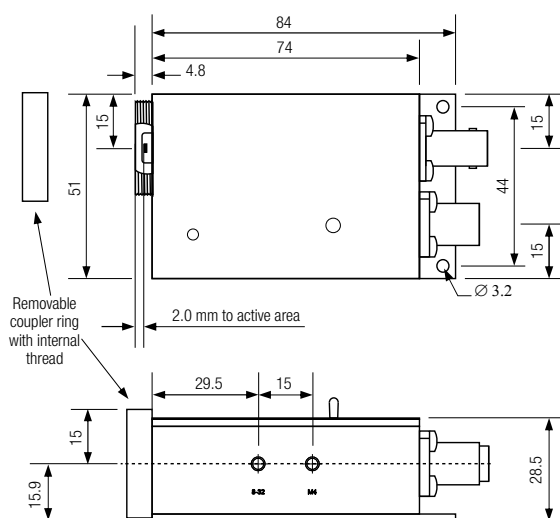

DZ-PWPR-2K-FST_R02

all dimensions in mm unless otherwise noted

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany

SOPHISTICATED TOOLS FOR SIGNAL RECOVERY
F E M T O

PWPR-2K-SI_R2/TH_JMa/16APR2024