FP-MA-19

Precision Mount for Laser Modules with 19 mm Diameter

The mount can be used for MVmicro, MVmicro-ST/MV18, MVpulse, MVpulseHP, MVstereo, HD series.

FEATURES

/ Adjustable precision mount for FLEXPOINT® laser modules with 19 mm diameter
/ Made out of aluminum
/ Optimal heat dissipation to the ground plane
/ Mount allows ±4 mm parallel adjustment, 360° coaxial rotation and ±2.5° angular adjustment (when laser is in central position)
/ Parallel adjustment: 0.7 mm per full screw turn
/ Rotation: approx. 3° per full screw turn

TECHNICAL DRAWING

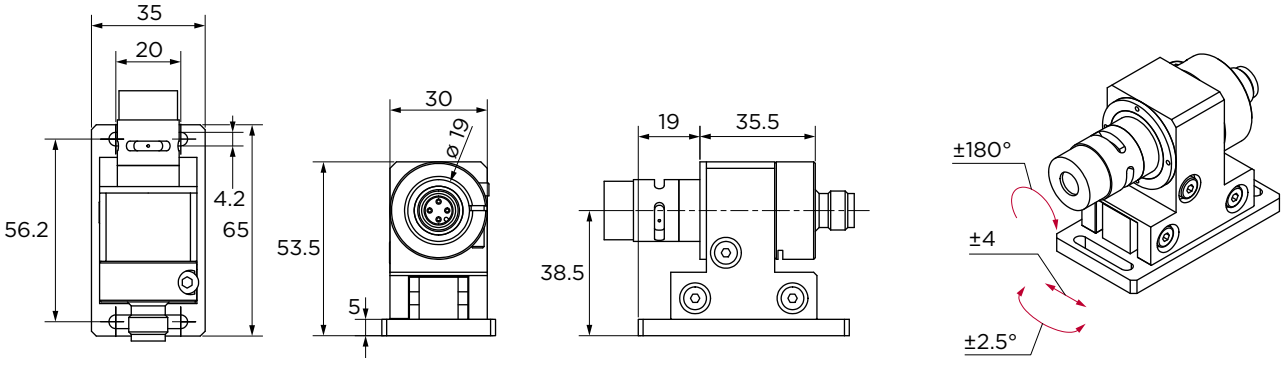

FP-MA-19 Mount

Units: mm

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864 – 0 info@lasercomponents.com www.lasercomponents.com
/ France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
/ United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
/ Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
/ USA LASER COMPONENTS USA, Inc. Tel +1 603 821 – 7040 info@laser-components.com www.laser-components.com

beyond borders

10/24 / V4 / KS-MaL / laser-modules/fp-ma-19-laser-module-mount-precision