FP-PS-12V

Power Supply

POWER SUPPLY WITH DC FEMALE CONNECTOR FOR 12 V SUPPLY

This plug can be used to connect any laser module with open leads to a power grid with 100 – 240 V supplying the laser with 12 V. The package contains the plug with 1.8 m cable and a female DC connector as well as the related male connector. The FP-PS-12V can for example be used for MVnano and MVpico with open leads.

SPECIFICATIONS

Rated input voltage [V]	100 – 240
Rated input frequency [Hz]	50/60
Rated input current [A]	0.25
Max. input power [W]	12
Output voltage [V]	12
Output current [mA]	1000 max.
Wire length [mm]	1800
Polarity	
Operating temperature [°C]	0 up to +40
Storage temperature [°C]	–20 up to +80

Male Connector included in delivery

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864 – 0 info@lasercomponents.com www.lasercomponents.com
/ France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
/ United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
/ Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
/ USA LASER COMPONENTS USA, Inc. Tel +1 603 821 – 7040 info@laser-components.com www.laser-components.com

TECHNICAL DRAWING

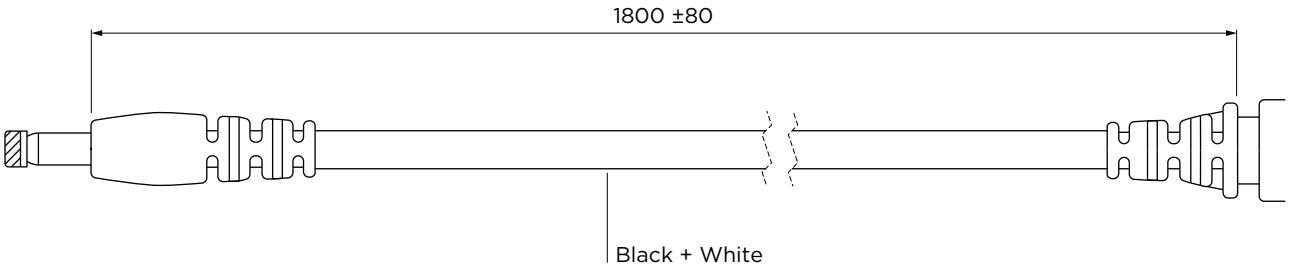

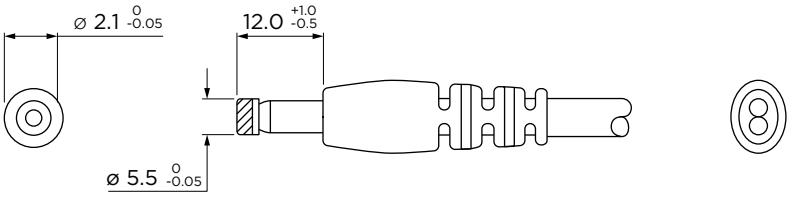

DC Female Connector

Units: mm

/ Germany and Other Countries LASER COMPONENTS Germany GmbH Tel +49 8142 2864 – 0 info@lasercomponents.com www.lasercomponents.com
/ France LASER COMPONENTS S.A.S. Tel +33 1 39 59 52 25 info@lasercomponents.fr www.lasercomponents.fr
/ United Kingdom LASER COMPONENTS (UK) Ltd. Tel +44 1245 491 499 info@lasercomponents.co.uk www.lasercomponents.co.uk
/ Nordic Countries LASER COMPONENTS Nordic AB Tel +46 31 703 71 73 info@lasercomponents.se www.lasercomponents.se
/ USA LASER COMPONENTS USA, Inc. Tel +1 603 821 – 7040 info@laser-components.com www.laser-components.com