






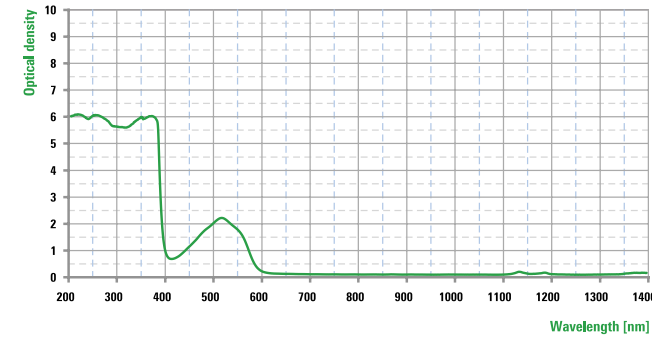

LASER SAFETY EYEWEAR - Technical specifications

FILTER CODE: UL-1019


Filter	Alignment protection
Colour	Pink
Material	Polycarbonate
VLT	19%
Alignment laser wavelength T%(λ) >10%	-



MODEL	561	562	559G	546	5X7	616L
FRAME STYLE						
ITEM CODE	○ 561H.00.00.307 ● 561H.00.01.307	○ 562S.00.00.307 ● 562S.00.01.307	559G.00.00.307	NOT AVAILABLE	NOT AVAILABLE	NOT AVAILABLE

Wavelength		OD	561	562	559G
440	500	1	0,01 W 2E-6J 440-500 RB1	0,01 W 2E-6J 440-500 RB1	0,01 W 2E-6J 440-500 RB1
>500	535	2	0,1 W 2E-5J >500-530 RB2	0,1 W 2E-5J >500-530 RB2	0,1 W 2E-5J >500-530 RB2
>535	570	1	0,01 W 2E-6J >535-570 RB1	0,01 W 2E-6J >535-570 RB1	0,01 W 2E-6J >535-570 RB1

3ET632/UL1019 Rev. 32/23