


LASER SAFETY EYEWEAR - Technical specifications



FILTER CODE: UL-2004

UNIVET

Filter	Full protection
Colour	Aqua
Material	Glass
VLТ	64%
Aiming beam wavelength T%(λ) >10%	380-720 nm

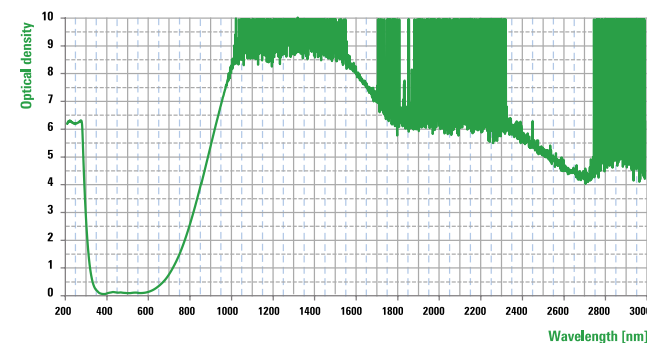

MODEL	561	562	559G	546	5X7	616L
FRAME STYLE						
ITEM CODE	○ 561H.00.00.200 ● 561H.00.01.200	○ 562S.00.00.200 ● 562S.00.01.200	559G.00.00.200	NOT AVAILABLE	NOT AVAILABLE	616L.00.00.008

Wavelength	OD	561	562	559G	616L
190 260	9	D LB8 IR LB4	D LB8 IR LB4	D LB9 IR LB4	D LB9 IR LB4
815 1400	3	DIR LB3	DIR LB3	DIR LB3	DIR LB3
850 1400	4	DIR LB4	DIR LB4	DIR LB4	DIR LB4
890 1400	5	DIR LB5	DIR LB5	DIR LB5	DIR LB5
930 1400	6	DIR LB6	DIR LB6	DIR LB6	DIR LB6 M LB6Y
950 1400	7	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y
990 1400	8	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y
1400 3000	5	DI LB4	DI LB4	DI LB4	DI LB4
9000 11000	6	DI LB4	DI LB4	DI LB4	DI LB4

3ET632/UL2004 Rev. 32/23